


Branello series

Application



Under a cabinet


On the ceiling



Features

- Various LED spot options
- Replaceable LED spots


Indoor Distribution Curve (GX-53)

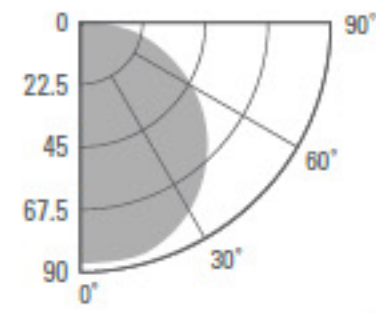

Average Beam Angle: 101°
Light Output: 250 Lumen


Branello I

Dimensions

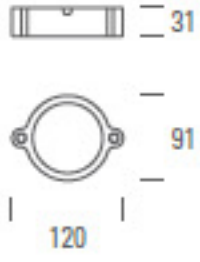


Luminosity

| Lamps | Voltage | Frequency | Current | Power | Flux |
|----------|----------|-----------|---------|-------|--|
| LED-29G | 220-240V | 50-60Hz | 18mA | 1.2W | 50LM (warm white) 55LM (cool white) |
| LED-65G | 220-240V | 50-60Hz | 20mA | 2.5W | 110LM (warm white) 120LM (cool white) |
| LED-GX53 | 220-240V | 50-60Hz | 42mA | 4W | 250LM |
| GX53CFL | 220-240V | 50-60Hz | 64mA | 7W | 220LM |

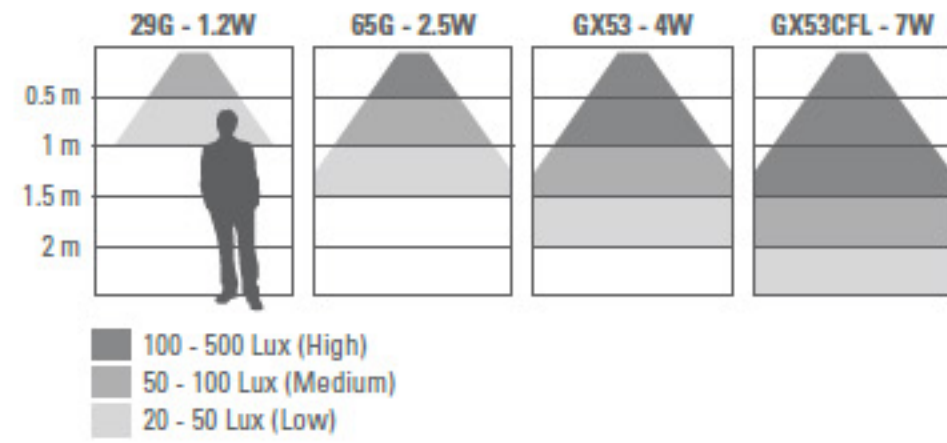


Branello II

Dimensions

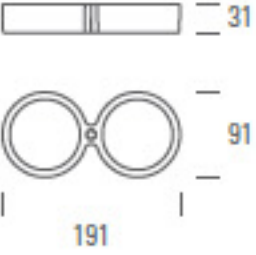


Luminosity

| Lamps | Voltage | Frequency | Current | Power | Flux |
|----------|----------|-----------|---------|-------|--|
| LED-29G | 220-240V | 50-60Hz | 36mA | 2.4W | 100LM (warm white) 110LM (cool white) |
| LED-65G | 220-240V | 50-60Hz | 40mA | 5W | 220LM (warm white) 240LM (cool white) |
| LED-GX53 | 220-240V | 50-60Hz | 84mA | 8W | 500LM |
| GX53CFL | 220-240V | 50-60Hz | 128mA | 14W | 440LM |

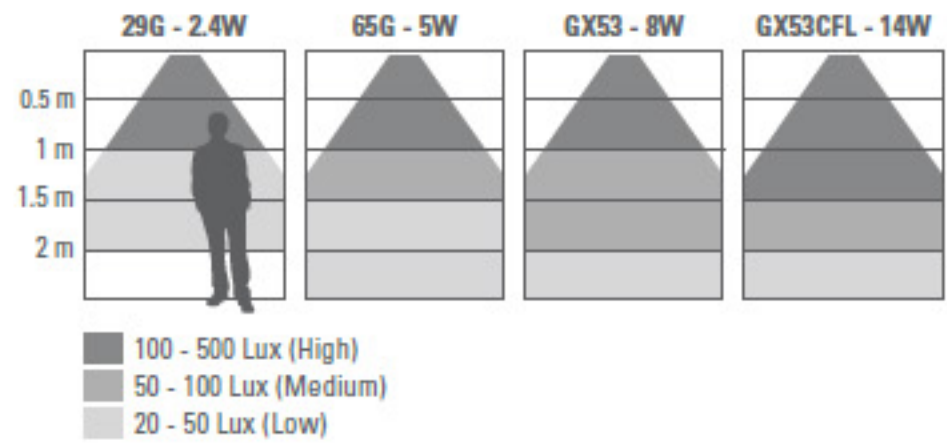


Branello III

Dimensions




Luminosity

| Lamps | Voltage | Frequency | Current | Power | Flux |
|----------|----------|-----------|---------|-------|--|
| LED-29G | 220-240V | 50-60Hz | 54mA | 3.6W | 150LM (warm white) 165LM (cool white) |
| LED-65G | 220-240V | 50-60Hz | 60mA | 7.5W | 330LM (warm white) 360LM (cool white) |
| LED-GX53 | 220-240V | 50-60Hz | 126mA | 12W | 750LM |
| GX53CFL | 220-240V | 50-60Hz | 192mA | 21W | 660LM |

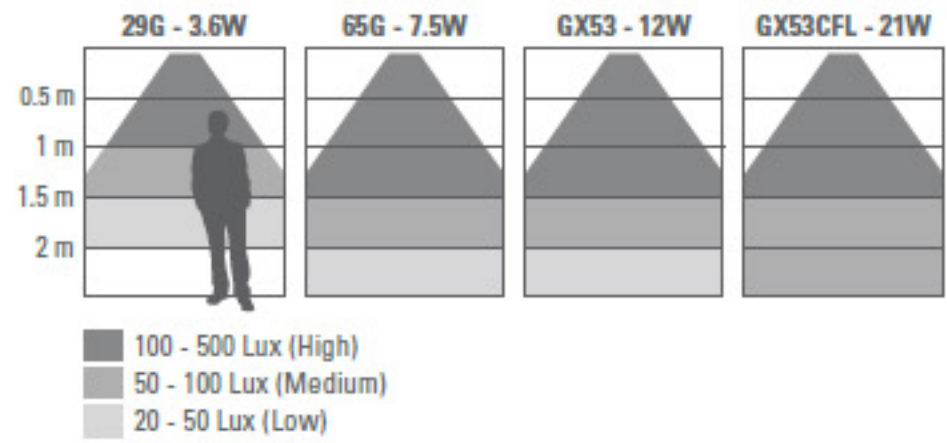


Branello IV

Dimensions

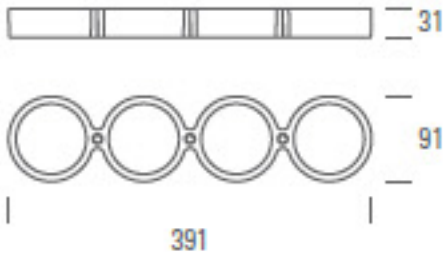


Luminosity

| Lamps | Voltage | Frequency | Current | Power | Flux |
|----------|----------|-----------|---------|-------|--|
| LED-29G | 220-240V | 50-60Hz | 72mA | 4.8W | 200LM (warm white) 220LM (cool white) |
| LED-65G | 220-240V | 50-60Hz | 80mA | 10W | 440LM (warm white) 480LM (cool white) |
| LED-GX53 | 220-240V | 50-60Hz | 168mA | 16W | 1000LM |
| GX53CFL | 220-240V | 50-60Hz | 256mA | 28W | 880LM |

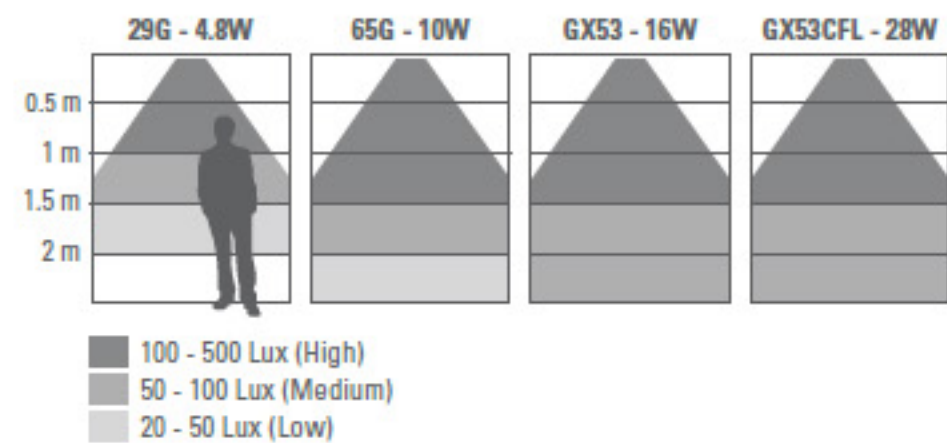

Branello IV Square

Dimensions

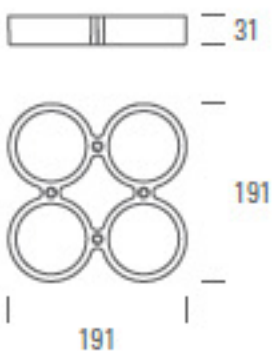

Luminosity

| Lamps | Voltage | Frequency | Current | Power | Flux |
|----------|----------|-----------|---------|-------|--|
| LED-29G | 220-240V | 50-60Hz | 72mA | 4.8W | 200LM (warm white) 220LM (cool white) |
| LED-65G | 220-240V | 50-60Hz | 80mA | 10W | 440LM (warm white) 480LM (cool white) |
| LED-GX53 | 220-240V | 50-60Hz | 168mA | 16W | 1000LM |
| GX53CFL | 220-240V | 50-60Hz | 256mA | 28W | 880LM |

