

# Chameleon series

## Application




In the ceiling



## Chameleon I

### Dimensions


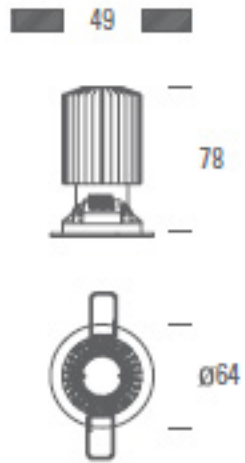


### Luminosity

Lamps	Voltage	Frequency	Current	Power	Flux
Chameleon 50	220-240V	50-60Hz	30mA	6W	180LM (warm white)
			25mA	5W	180LM (cool white)


## Features

- Lighting adjustment in any direction (A)
- Also available with a dimmable driver (B)

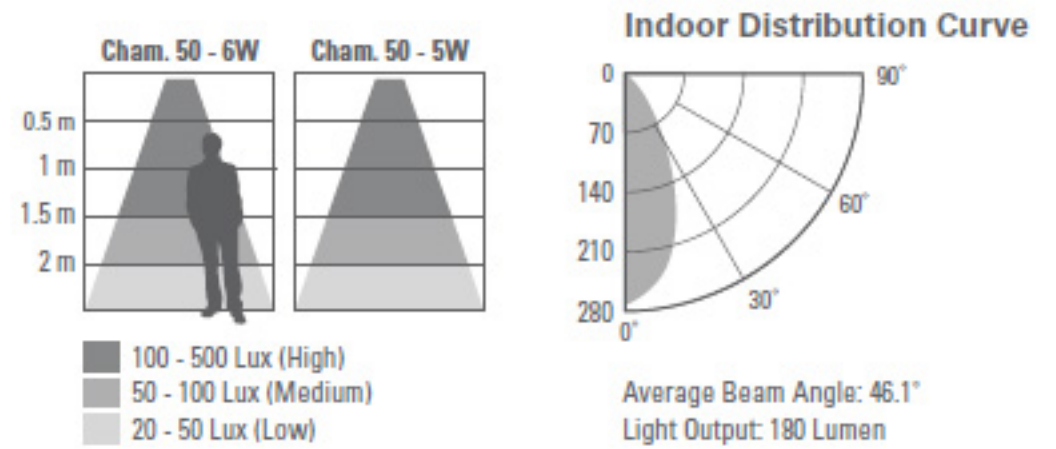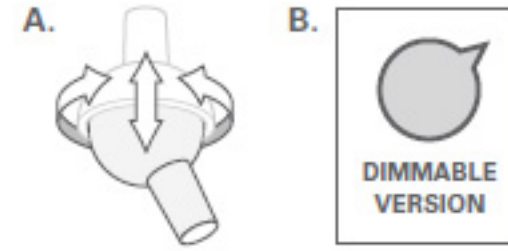


## Chameleon II

### Dimensions

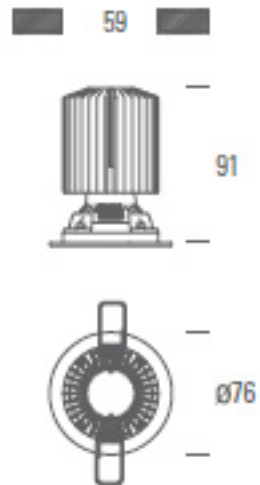


### Luminosity

Lamps	Voltage	Frequency	Current	Power	Flux
Chameleon 60	220-240V	50-60Hz	40mA	8W	280LM (warm white)
			30mA	6W	280LM (cool white)

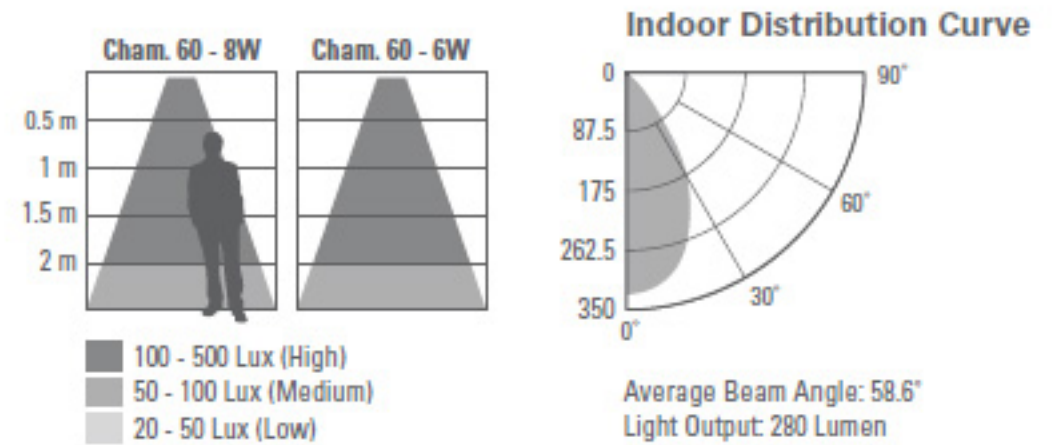

## Chameleon III

### Dimensions

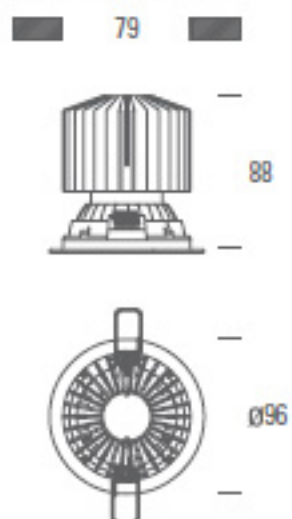

### Luminosity

Lamps	Voltage	Frequency	Current	Power	Flux
Chameleon 80	220-240V	50-60Hz	60mA	12W	410LM (warm white)
			45mA	9W	410LM (cool white)

